

## Mounting Feet

Non-penetrative mounting base for flat roofs

Material specifications	
<b>Material</b>	High quality glass fibre reinforced polyamide with bonded rubber mat base
<b>Properties</b>	<b>Service Temperature:</b> -20 °C to +70 °C





### Applications

- Non penetrative installation of pipes, ventilation ducts and cable trays on flat roofs

### Features & Benefits

- Enables optimum weight distribution over whole foot print
- UV Resistant High quality glass reinforced polyamide
- Quick and easy to Install
- Supplied together with Anti Vibration Rubber Mat
- Compatible with FXR 41|41 mounting rails
- Can be combined with other Fixotec support solutions for a complete and cost-effective package

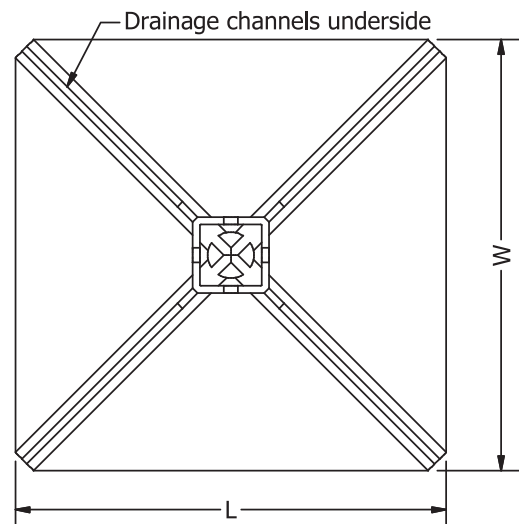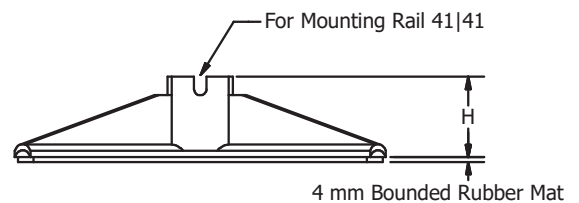

### The Assembly consists of:

- 1 Roof base
- 1 Anti-slip mat (must be attached on the Roof base according to the installation instructions)

### Select Variant

Article No.	Product Description	FXR Mounting Rail	L (mm)	W (mm)	H (mm)	Max. Recommended Load (N)	Weight (Kg)
682000	FX Roof Base 300	41   41	300	300	65	2000	1.40
682010	FX Roof Base 450	41   41	450	450	65	2500	2.50

### Note:

- A range of materials are used as insulation on flat roofs, and vary significantly in their compressive strength, which must be checked before installation on site.
- The load bearing capacity of the roof structure must be taken into consideration with the extra load of the equipment to be placed on the assembly.